

Feature-Based Reverse Engineering of Mechanical Parts

William B. Thompson, *Senior Member, IEEE*, Jonathan C. Owen, H. James de St. Germain,
Stevan R. Stark, Jr., and Thomas C. Henderson, *Senior Member, IEEE*

Abstract—Reverse engineering of mechanical parts requires extraction of information about an instance of a particular part sufficient to replicate the part using appropriate manufacturing techniques. This is important in a wide variety of situations, since functional CAD models are often unavailable or unusable for parts which must be duplicated or modified. Computer vision techniques applied to three-dimensional (3-D) data acquired using noncontact, 3-D position digitizers have the potential for significantly aiding the process. Serious challenges must be overcome, however, if sufficient accuracy is to be obtained and if models produced from sensed data are to be truly useful for manufacturing operations. This paper describes a prototype of a reverse engineering system which uses manufacturing features as geometric primitives. This approach has two advantages over current practice. The resulting models can be directly imported into feature-based CAD systems without loss of the semantics and topological information inherent in feature-based representations. In addition, the feature-based approach facilitates methods capable of producing highly accurate models, even when the original 3-D sensor data has substantial errors.

Index Terms—Feature-based CAD, reverse engineering, surface fitting.

I. INTRODUCTION

CAD MODELS are often unavailable or unusable for parts which must be duplicated or modified. This is a particular problem for long life cycle systems for which spare part inventories have been exhausted and original suppliers are unable or unwilling to provide custom manufacturing runs of spare parts at affordable prices and in a timely manner. For many parts, either CAD systems were not used in the original design or the documentation on the original design is otherwise inadequate or unavailable. For a variety of reasons, CAD models, even when they exist, may not be sufficient to support modification or manufacturing using modern methods. Finally, shop floor changes to the original design may mean that the original CAD model no longer accurately reflects the geometry of the part. *Reverse engineering* techniques can be

Manuscript received February 18, 1997; revised October 3, 1998. This work was supported by the Advanced Research Projects Agency under Army Research Office Grant DAAH04-93-G-0420. This paper was recommended for publication by Associate Editor A. Kusiak and Editor V. Lumelsky upon evaluation of the reviewers' comments.

W. B. Thompson, H. J. de St. Germain, and T. C. Henderson are with the Department of Computer Science, University of Utah, Salt Lake City, UT 84112 USA.

J. C. Owen was with the University of Utah, Salt Lake City, UT 84112 USA. He is now with Red Storm Entertainment, Morrisville, NC 27560 USA.

S. R. Stark, Jr., was with the University of Utah, Salt Lake City, UT 84112 USA. He is now with Orbtex, Inc., Salt Lake City, UT 84115 USA.

Publisher Item Identifier S 1042-296X(99)01227-6.

used to create CAD models of a part based on sensed data acquired using three-dimensional (3-D) position digitization techniques [1]. Part-to-CAD reverse engineering produces models which allow up to date NC fabrication and facilitate design modification. Successful instances include everything from sporting goods to aircraft parts.

Reverse engineering of solid objects traces its roots back to the pantograph, which uses a mechanical linkage to duplicate arbitrary geometric shapes at any predetermined scale. Copy lathes and mills are more contemporary and automated versions of the pantograph. In a copy lathe, a mechanical stylus is moved along a template specifying a 1-D profile. The position of the cutter is adjusted based on this template, producing a revolute object with the same profile. A copy mill typically moves a stylus over a surface, using the height of the surface to set the z -axis in a three-axis mill, thus making a copy of the original object. Several vendors have produced copy mills which use noncontact sensors. These systems have the added advantage of storing the sensed profile, so that an object can be duplicated many times without repeated scanning.

Copy lathes and mills duplicate a physical part without producing any intermediate model of the geometry of the part, other than stylus position or 3-D points acquired with a noncontact sensor. While some can produce NC code capable of driving other lathes and mills, none can produce a CAD model of an existing part. Such models are desirable for a number of reasons. Modifications to the part cannot easily be done at the level of NC code. Even if the part is to be duplicated as is, refixturing and hidden concavities often lead to situations in which multiple scans of an object's shape must be combined into a single, consistent representation. Some shape properties such as deep holes will not be accurately measured by either mechanical styli or noncontact sensors.

The most straightforward approach to generating a reverse engineered geometric model of a mechanical part involves a designer or engineer making measurements using traditional devices such as calipers and gauges and entering the results into a standard CAD system. When high precision is required, contact coordinate measuring machines (CMM's) are often used. Positional accuracy on the order of $\pm 3 \mu\text{m}$ locally and $\pm 14 \mu\text{m}$ corner to corner is possible, but sensing of a large number of points is extremely slow and expensive damage can be done if the probe is not maneuvered toward the object along an appropriate path. More recently, noncontact CMM's produced by companies such as Cyberware, Digibotics, and Laser Designs have significantly increased the speed with

which data can be collected. These devices project a spot or line of light and use triangulation to determine range. While less accurate than contact CMM's, the best are capable of positional accuracy exceeding $\pm 50 \mu\text{m}$. Nonoptimal surface properties can degrade this, while deep concavities, discontinuous surface orientation, surface geometries forcing oblique viewing angles, or outright occlusion will cause data to be missing entirely. (See [2] for methods which position sensors in ways that minimize these effects.) For comparison, commonly available NC milling machines can achieve precisions of $\pm 2\text{--}10 \mu\text{m}$ for hole and bore spacings and can produce cutting accuracies on the order of $\pm 50\text{--}250 \mu\text{m}$ depending on the feature being cut and the tool being used, though special measures can be used to obtain higher precision.

Many of the commercially available systems for the reverse engineering of mechanical parts using automatically acquired 3-D position data use rather unsophisticated geometric models. Often, a digitizer is moved along parallel scanning paths and NC code is generated to move a cutter along the same 3-D path. In effect, no model other than the raw scan data is used, though preprocessing to remove noisy data points, align scan lines from multiple scans, etc., is usually necessary. More recently, techniques have been developed for fitting parametric surface patches to 3-D position data [3]. The geometric primitives that are used range from simple planes and cylinders [4] to piecewise smooth surface parametric surface patches [5]–[7]. Sometimes, triangulated meshes are used as an intermediate representation [8]–[13]. Several software *surfacing* packages, including Imageware Surfacer, Parametric Pro/SCAN-TOOLS, and Cyberware Cyserf, have recently become available. These packages fit spline patches to raw data points and format the result for importation of the surfaces into commercial CAD systems.

Models acquired in any of these ways represent the as-measured geometry of the sample part. Substantial manual intervention is still required in order to convert these models into CAD descriptions of the original design intent [1]. In addition, the collection of surface patches that result from the methods cited above often fail to satisfy the constraints required by topologically valid B-reps of solid objects, requiring additional manual editing of the models. Together, these two steps often account for a major portion of the expense in producing usable reverse engineered CAD models.

The current practice of creating models by fitting generic surface patches to scanned data is most appropriate for parts consisting largely of sculptured surfaces. Representing geometry in terms of surface points or collections of parametric surface patches is adequate to describe positional information, but cannot capture any of the higher level structure of the object. It is thus quite difficult to make modifications or to generate efficient and effective process plans automatically. For example, these representations might be able to capture the shape of a hole, but the fact that it is actually a true, cylindrical hole is not made explicit. As a result, it can be difficult for a designer to do something as simple as change the diameter of the hole. Modification of more complex features is even more difficult.

The nature of the design process and the various technologies for creating manufactured parts limit the geometries

commonly found on such parts. For example, a large portion of milled parts consist of planar surfaces containing $2\frac{1}{2}$ -D features such as holes, pockets, bosses, and the like.

In this paper, we describe an alternate approach for efficiently creating a CAD model of a part with a significant number of such specialized manufacturing features. The system is interactive, since some aspects of the reverse engineering process cannot be done based on the part alone and other aspects of the process can benefit significantly from a small amount of human intervention. In a sense, we provide a set of *electronic calipers* to be used as a smart measuring tool, specialized to the job of creating CAD/CAM models. The system is effective because it analyzes 3-D sensor data using knowledge of manufacturing processes and modeling techniques.

Our main innovation is to use manufacturing features as the geometric primitives fit to scanned data, rather than using triangulated meshes or parametric surface patches. This leads to four important advantages.

- 1) *Appropriateness for Manufactured Parts:* Many complex parts can be described naturally and compactly in terms of manufacturing features. A feature-based reverse engineering system can more easily generate models of such parts than can a system intended for more general free-form geometries.
- 2) *Ease of Importation into Feature-Based CAD Systems:* Several commercially available CAD systems allow parametric modification of manufacturing features in their models. This functionality is lost, however, if imported models consist only of surface patches, without the additional semantics and topology inherent in feature-based representations.
- 3) *Reduced Need for Complete, Robust, Geometric Computations:* Substantial effort is involved in converting a collection of surface patches obtained by fitting to scanned data into a form usable by a solid modeler. Topology and other aspects of patch adjacency must be determined, a process often involving substantial hand editing. By generating an object representation in terms of higher-level manufacturing features, correct lower-level B-rep solid models can be generated by existing CAD packages and their generation need not be the responsibility of the reverse engineering system.
- 4) *Accuracy:* Noncontact position digitizers are subject to errors which can exceed the tolerances needed in recreating many parts. The local smoothing that is implicit in methods based on fitting surface patches to position data may not be optimal for reducing this sensing noise. The use of manufacturing features as primitives can substantially increase the accuracy of the generated models without the need for extensive manual intervention.

II. REPRESENTING PART GEOMETRY IN TERMS OF MANUFACTURING FEATURES

A number of modern CAD/CAM systems support some form of *feature-based design*, allowing designers to specify

| | |
|--|---|
| Stock | Facing Features <i>straight step</i> <i>profile face</i> |
| Hole <i>simple hole</i> <i>counter bore</i> <i>counter sink</i> <i>counter drill</i> <i>tapped hole</i> <i>counter drilled tapped</i> <i>back counter bore</i> <i>back counter sink</i> <i>step bore</i> | Grove <i>internal groove</i> <i>external groove</i> <i>face groove</i> <i>profile groove</i> |
| Slot | Boss <i>circular boss</i> <i>profile boss</i> |
| Pocket <i>rectangular pocket</i> <i>profile pocket</i> | Profile Features <i>profile chamfer</i> <i>profile round</i> <i>profile side</i> |

Fig. 1. Manufacturing features in the Alpha.1 CAD system.

a shape in terms of complex primitives [14]. Design systems of this sort have two clear advantages over modeling solely at the level of detailed geometry. They provide a more natural interface for machinists and they allow much more sophisticated automated process planning, since the intent of the designer is clearer. There is as yet no consensus on what specific modeling primitives should consist of in such systems. In an ideal feature-based design environment, the primitives would specify nominal geometry, tolerances, materials and finishes, assembly properties, and other aspects of intent. In commercial CAD packages such as Parametric's Pro/ENGINEER and Bridgeport's EZFeatureMILL, and in full function research CAD/CAM systems such as the University of Utah's Alpha.1 [15], the emphasis is on form features that typically have a close association with machining operations.

Fig. 1 shows the manufacturing features available in Alpha.1. Each of these feature types has associated with it the appropriate geometric information plus manufacturing specifications such as fillets and chamfers. Free-form surfaces can be freely mixed with these features. Alpha.1 automatically creates NURBS representations for all features and free-form surfaces, intersects surfaces appropriately to create a topologically valid B-rep, and is able to generate with a minimum of human intervention high-quality NC code from models specified using these primitives. Our current reverse engineering system uses a subset of the features in Fig. 1. Extending the system to the full set of features listed there will require substantial engineering effort, but is in principle straightforward.

Several methods have been proposed for automatically extracting a high-level, feature-based description from lower-level models of part geometry [16]–[18]. The goal is usually to start with a conventional volumetric representation of part geometry, derive an alternate representation in terms of features, and then use this information as an aid in process planning. All of these systems start with an exact representation of surface shape. While they provide useful ideas applicable to creating high-level models from sensed data, none begin to

deal with the error and variability present in such data. As described below, we use an interactive approach in our modeling system which avoids the need for automated recognition of manufacturing features.

III. FEATURE-BASED REVERSE ENGINEERING

Sensor-based reverse engineering of mechanical parts must yield complete and accurate object models appropriate for computer-aided manufacturing. Current commercial practice, which represents geometry in terms of scan lines or meshes of scan points, is inflexible and requires careful coordination between scanning patterns, tool selection, and tool paths. Parametric model fitting techniques proposed to date do not use geometric primitives that are natural to most manufacturing operations. Methods for extracting manufacturing features from lower-level geometric representations are intended to work with existing CAD models, not imperfect sensed data.

Improvements can be made by specializing the recovery of object models to the manufacturing environment. Most machined parts are made using a relatively small number of manufacturing operations, each of a constrained form (Fig. 1). Reverse engineering can be done using a form of parametric model fitting where primitives correspond to these features. This avoids inconsistencies between actual object shape and what the models are capable of representing, while leading in a natural and obvious way to representations usable in feature-based CAD/CAM systems. The approach we describe here is interactive, which improves performance and allows for human entry of information that cannot be acquired from sensed data alone.

To demonstrate the effectiveness of feature-based reverse engineering, we have created a prototype system called REFAB (Reverse Engineering—FeAture-Based). REFAB allows a user to interactively define a model composed of mechanical features from a set of 3-D surface points. The user specifies the types of manufacturing features present and the approximate location of each feature in the object. REFAB deals with the determination of precise, quantitative parameterization of each feature. The final output is a fully specified model usable by the Alpha.1 CAD/CAM system. Though we have not yet done so, it would be relatively easy to produce models suitable for other CAD packages supporting manufacturing features, such as Pro/ENGINEER. The ability to create feature-based models in a more generic form awaits further progress on standardization efforts such as PDES/STEP.

Fig. 2 shows the user interface for the REFAB system. All modeling computations are done on 3-D point cloud data obtained from position digitizers. User interaction involves a point and click interface, allowing the user to specify 3-D features on the two-dimensional (2-D) screen. The series of small images along the top corresponds to alternate views of the same object and allows the user to specify a current working view. REFAB maintains a single, internal coordinate system and views can be switched at any time to provide a better perspective on whatever feature the user is currently interested in. The set of buttons at the lower left corresponds to the set of features the system is able to model.

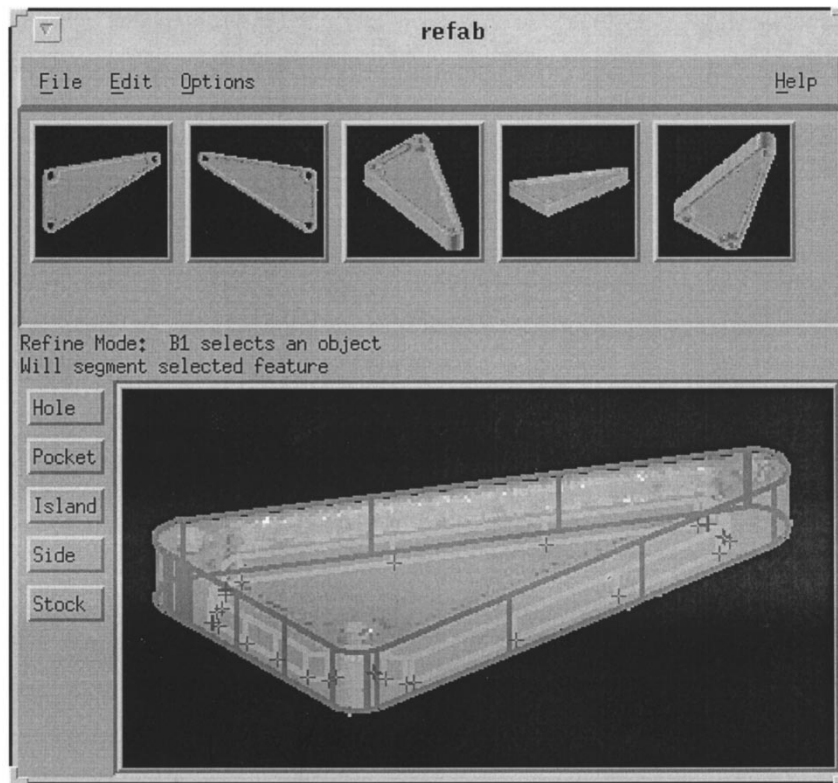


Fig. 2. REFAB user interface.

To model a feature, the user selects a feature type and a view in which the feature can be seen on the object. The panel on the lower right displays the selected view and all previously modeled features. The user is then asked to specify enough points on the displayed image to indicate the approximate location and shape of the feature. REFAB uses this initial guess to compute an optimal parameterization of the feature based on the 3-D position data. Finally, REFAB renders the feature on the display, and then waits for the next feature to be modeled.

While a fully automated system might seem desirable, there are two aspects of modeling for manufacturing that are infeasible based on automatic processing of sensed data alone. Fig. 3 shows a downward-looking view of a plate with an opening in the middle. The opening can be represented exactly using either two holes or a single profile pocket. To choose the preferable representation requires a rather complex understanding of dimensions, tolerances, and manufacturing costs. Next, consider a part which contains seven through holes of identical diameter, four of which mate with locating pins on another part, two of which stack with holes on parts to either side to form a conduit for oil, with the remaining hole providing access for a flexible cable that runs from one side of the part to the other. The tolerances and finishes required vary enormously. Cost effective fabrication requires that this information be understood and accounted for in the manufacturing process plan. The REFAB system acknowledges the need for human intervention, but frees the user from most of the tedious, quantitative analysis that can be done faster, easier, and more accurately by automated tools.

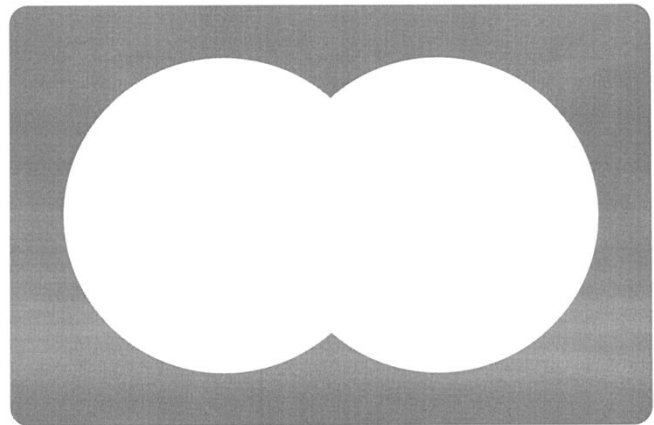


Fig. 3. Two interacting holes or one pocket?

The current version of REFAB is limited to five common types of $2\frac{1}{2}$ -D features: *stocks*, *simple holes*, *profile pockets*, *profile islands*, and *profile sides*. Profile features are extrusions of arbitrary planar curves. A profile island is a special kind of boss. It is defined only within the context of a pocket and specifies a volume to be “skipped” when the pocket is milled. A profile side represents a simple side cut (no plunging), and is typically used to trim stock down to the outside shape of a part. The features are typical of those in parts machined using three-axis mills for simple drilling and parallel sided cutting. Features can have different orientations, as would occur with refixturing with a three-axis milling.

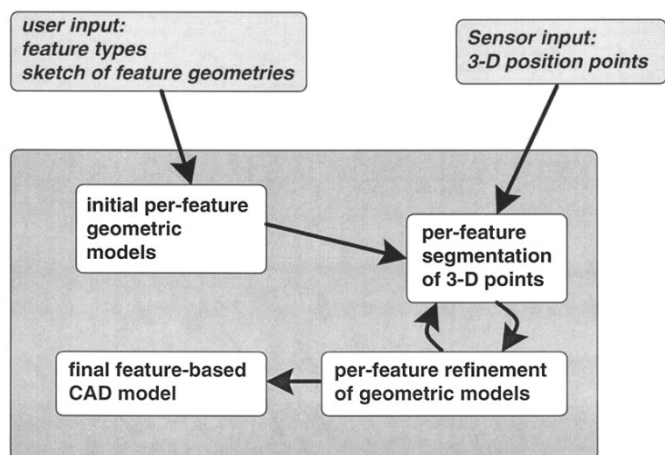


Fig. 4. Overview of the REFAB system.

IV. SEGMENTATION, FITTING, AND REFINEMENT

Three interrelated problems must be solved in order to accurately model a particular manufacturing feature: determination of feature type, segmentation of relevant 3-D points, and model fitting. Fig. 4 illustrates the interactions between user input, sensor data, data segmentation, and model fitting used to accomplish these tasks. In our system, the user specifies the feature type and approximate location using REFAB's interface. Thus, no automatic feature recognition is required. The segmentation and fitting operations proceed automatically, using an iterative refinement process in which the current model is used to segment sensed data into subsets of 3-D points likely to correspond to particular features and then fitting models appropriate to the feature type to that data.

REFAB avoids most difficulties associated with data partitioning by using a robust, top-down segmentation technique. Two classes of constraints are used in the model fitting process. The first exploits the $2\frac{1}{2}$ -D nature of the part geometry. Once the orientation of each $2\frac{1}{2}$ -D feature has been determined, the remainder of the analysis for that feature can be done in a 2-D space in which the 3-D geometry has been projected along the axis of feature orientation. The second class of constraints is based on the use of manufacturing features as primitives and knowledge about how designers typically express the geometry in such features when parts are initially created.

Each $2\frac{1}{2}$ -D feature has an orientation. Currently, we allow for this orientation to be specified with respect to some flat portion of the part or with respect to the part's fixturing while being scanned. This is accomplished by having the user click on several points on the corresponding planar surface in any view. A plane is fit to these points using the least median squares (LMedS) method, which largely eliminates the effect of outliers in the selected points [19]. This plane is used to segment out all the data points from the 3-D point cloud which are likely to form the true plane, based on distance and orientation measures. Finally, a plane is fit to these points, using a trimmed distribution least-squares method (see below). The same approach is used to allow the user to specify planar aspects of features such as pocket bottoms.

Once the user has specified the orientation of a $2\frac{1}{2}$ -D feature, he or she then indicates a rough outline of the feature by clicking on a sampling of points along the contour of the feature. The points are intersected with the orientation plane, yielding a set of 2-D points corresponding to the feature's 2-D geometry. These 2-D points are then used to generate an initial parameterization of each feature. Initial estimates for a hole feature involve the hole center, based on the center of mass, and the hole radius, based on the average distance to the selected points from the center of mass. Initial estimates for profile pockets, profile islands, and profile sides require a 2-D closed profile curve as part of their specification. This curve is computed from the user indicated points by fitting a Bezier curve [20].

Fitting a parameterized feature model to sensed data requires a decision as to what data points should be considered to lie on the feature and which values are part of other features. Most other approaches to dealing with position data use some form of bottom up segmentation procedure [21], [22]. Data associated with the flat faces of polyhedral objects is found using plane fitting techniques. Data associated with curved faces is found using grouping operations which combine collections of points into surfaces, followed by detection of lines of orientation discontinuities. However, few mechanical parts are polyhedra. For curved surfaces, segmentation based on orientational discontinuities is problematic due to noise effects in most range sensors, which produce substantial local variations in surface normals. This problem is particularly acute at surface boundaries, where reliable information is essential for bottom-up processing.

Since in our case the user has specified an approximate feature type and location, we can use a much more reliable top-down segmentation approach. Given an approximate feature parameterization, we select those position points that are close to the surface of the estimated feature in *both* distance and orientation. The combination gives a much better indication of points that are really part of the feature than would either property alone. For example, consider the problem of finding those sensed points on the wall of a drilled hole. Clearly, we want to consider only those points near the expected location of the hole. Using only a distance check, however, will inevitably include some points on the surface through which the hole was drilled, near the rim of the hole. An orientation check quickly discards these points. Additional improvements are obtained by further restricting the distance check, based on per-feature information about where sensor error is most likely to be highest. In the case of the hole, data near the rim and deep within the hole is most suspect. An initial segmentation is done using a large tolerance for distance and orientation, but only using those parts of the user-specified model which are expected to yield the best sensed data. As the estimate of feature parameters is refined, the position data can be resegmented using tighter tolerances on distance and orientation, while reducing or eliminating the restrictions on which parts of the feature surface to consider.

The fitting process utilizes a nonlinear optimization algorithm based on the generalized simplex process [23]. The criterion function that is minimized is the sum of the squared

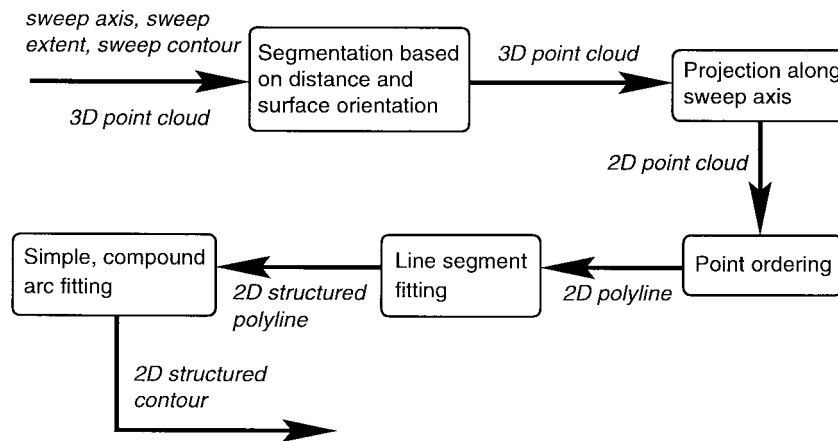


Fig. 5. Details of the model fitting process.

distances from each selected point to the feature. An initial guess is given to the simplex routine based on the user's estimation. We have found no need to go to more sophisticated, maximum-likelihood data fitting [24]. In our current implementation, three distinct surface types are possible. Separate methods exist for fitting each surface type to the segmented data [25].

- 1) *Planar Surfaces:* To avoid the computational complexity associated with least-median-squares robust plane fitting, we use a simpler trimmed distribution least-squares approximation. A least-squares fit to the data points is done using the familiar eigenvector method. We then compute the residuals associated with each data point and remove a percentage of the points that are farthest away from the fit plane. A second least-squares approximation is done to this reduced set of points, yielding the final plane fit. Combined with the initial data segmentation, this two-step process minimizes the effect of outliers almost as well as a full LMedS optimization.
- 2) *Holes:* Holes are fit to data points in the same manner that they are fit to user indicated hole contours. First, the hole orientation relative to some planar surface on the part or relative to the part fixturing is determined. The data points are then projected along this direction. Finally, the center and radius of the circle best fitting the projected points are found using standard nonlinear optimization techniques. Though we do not currently do so, the optimization can be made more robust to outliers by using a nonconvex optimization function instead of the sum-of-squared distances currently employed.
- 3) *Extruded Profiles:* As with simple holes, profile features are defined in terms of an orientation and a 2-D contour. The initial, user-specified contour is represented in terms of a Bezier curve. Segmented points likely to correspond to a particular profile side are projected into 2-D along the sweep direction of the profile feature. The data points are sorted based on the parameter value of the nearest point on the Bezier curve [26]. Sequences of points which can accurately be approximated by line segments are identified [27]. The remaining points corresponded to curved portions of the profile. An attempt

is made to fit each of these segments using one, two, or three constant radius arcs of alternating curvature. If this fails, the segment is fit with a general Bezier curve.

Fig. 5 illustrates the key steps in the model fitting process for profile features. The geometry of these features is specified in terms of a sweep axis, a sweep extent, and a 2-D sweep contour. This information can be used to extract a 3-D point cloud of data points likely to be part of the feature. Projection along the sweep axis results in 2-D data points, which can be ordered to produce a polyline representation of the original data. Extraction of long line segments is followed by fitting the remaining data to simple and compound arc segments. Segmentation and fitting alternate until preset tolerance bounds are met for the segmentation process.

V. EXPERIMENTAL RESULTS

Few if any of the publications describing part-to-CAD reverse engineering address the issue of modeling accuracy, despite the critical role of design verification in the overall reverse engineering process [28]. To quantitatively evaluate the accuracy of the models obtainable using the feature-based modeling approach, we started with parts for which we had access to the original CAD models [29]. Instances of these parts were carefully machined out of aluminum using a three-axis NC mill. Surface points on the parts were measured using a noncontact laser digitizer. New CAD models for each part were generated using the REFAB system. Finally, the geometric differences between the original and recovered models were computed. This was done by registering the two models based on common planar surfaces [30]. We then generated a dense, uniformly sampled set of points on the reverse engineered model. Standard CAGD techniques were used to find the distance to the closest surface point on the original model. RMS and worst-case distances were reported for each surface making up the reverse engineered model and for the model as a whole.

We have tested the REFAB system on several machined parts originally designed for the Utah mini-Baja and formula SAE racing vehicles. Results from two of these parts are presented here. While the parts are relatively simple, they provide an adequate test of the accuracy and usability of our system.

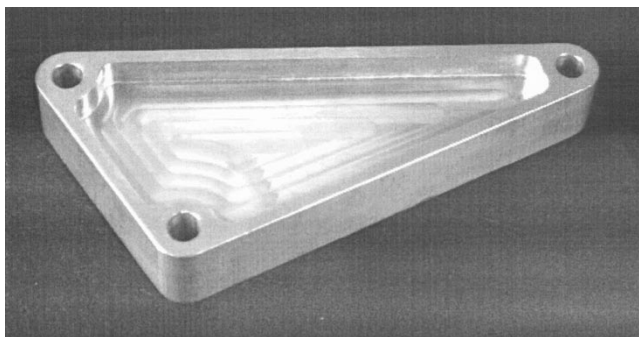


Fig. 6. Shock plate: original part.

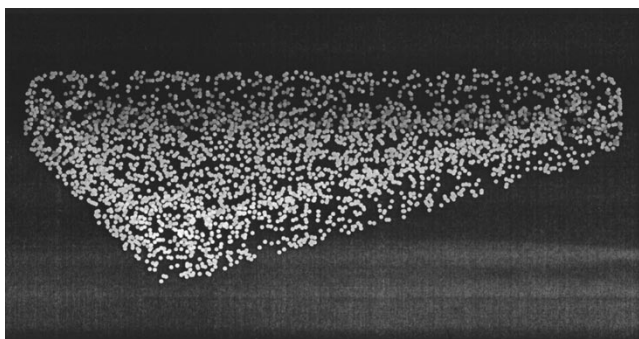


Fig. 7. Shock plate: sensed 3-D position points.

Fig. 6 shows the shock mounting plate that forms a linkage in one version of the rear suspension of the vehicle. To fit the scan volume of our scanner, a special plate was made that was three quarters the size of the one used on the vehicle itself, yielding a part that was approximately $17.75 \text{ cm} \times 7.5 \text{ cm} \times 2 \text{ cm}$. The second object is part of the vehicle's steering arm assembly and is approximately $10 \text{ cm} \times 5 \text{ cm} \times 2 \text{ cm}$ (Fig. 13).

Position data was acquired with a DIGIBOT II laser position digitizer. The DIGIBOT II has a nominal measurement accuracy of $\pm 50 \mu\text{m}$ (1σ) under optimal conditions. In practice we have observed accuracies on the order of $\pm 50\text{--}300 \mu\text{m}$, depending on the nature and shape of the surface at that point. For evaluation purposes, we produced special versions of both parts without chamfers and threads, which were too small to be accurately measured with the DIGIBOT system. To remove specularities that cause problems for most current range finding systems, parts were sprayed with a penetrant process developer (Sherwin DUBL-CHEK D-100), which leaves a thin, talcum-like coating. Multiple views were taken of each part and transformed into common point-cloud data sets, using a registration procedure similar to that in [30]. 102 080 3-D points were used for the shock plate, 40 180 for the steering arm.

Fig. 7 shows a depth-cued rendering of the 3-D position points obtained from the DIGIBOT sensor. The figure shows the point cloud data after multiple scans have been registered into a single dataset with a common coordinate system. Fig. 8 shows a line drawing rendering of the user-provided rough sketch of one of the pockets. This sketch was used to segment 3-D points corresponding to the pocket contour as shown in

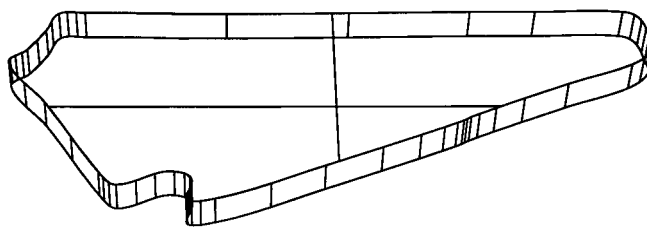


Fig. 8. Shock plate: user sketch of interior pocket.

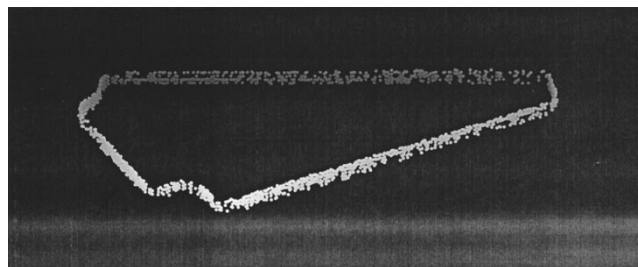


Fig. 9. Shock plate: segmented sensed 3-D position points associated with user sketch of interior pocket.

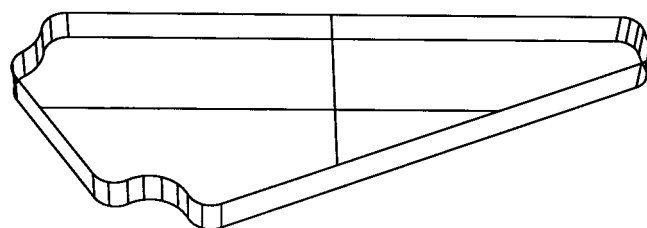


Fig. 10. Shock plate: pocket fit to segmented data shown in Fig. 9.

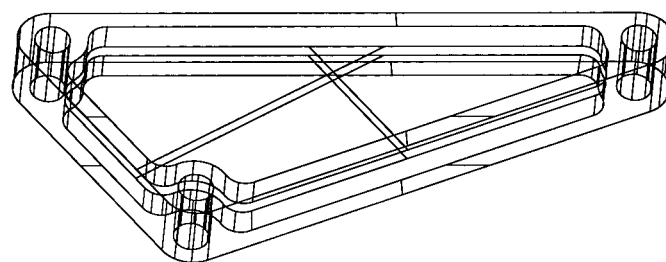


Fig. 11. Wire frame rendering of full reverse engineered shock plate.

Fig. 9. Fig. 10 shown the results of automatically fitting a pocket feature to the segmented data points. Fig. 11 shows a wire-frame rendering of the complete reconstructed CAD model, which was then used to manufacture a copy of the original part as shown in Fig. 12. Figs. 13–16 show the original part, sensed data, reconstructed model, and reconstructed part for the steering arm.

Figs. 11 and 15 are wire frame drawings generated from the reverse engineered CAD models produced by REFAB for the two parts. To emphasize that the recovered CAD models are feature-based and not just arbitrary surface representations, Figs. 17 and 18 show exploded views of the two models indicating the separate features making up each object. The shock plate is a fairly simple object with an outer contour defined by a profile side, two symmetric profile pockets that

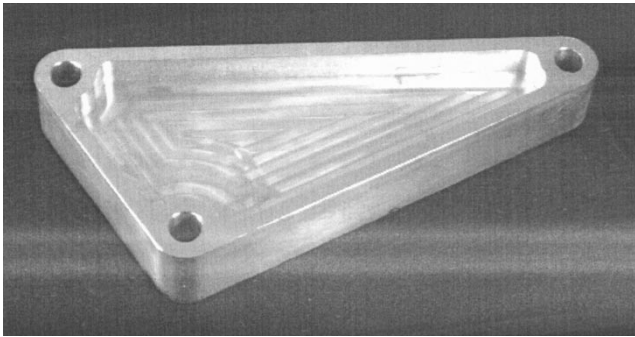


Fig. 12. Shock plate: final reverse engineered part.

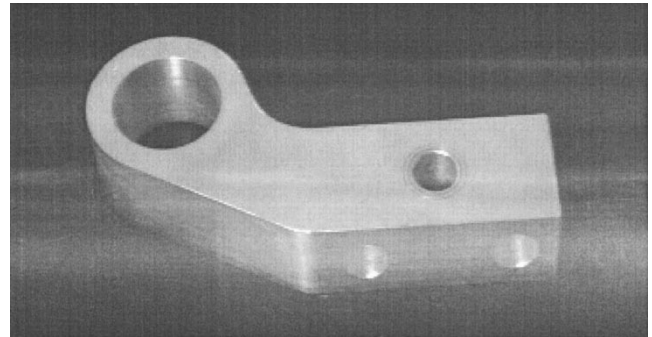


Fig. 16. Steering arm: reverse engineered part.

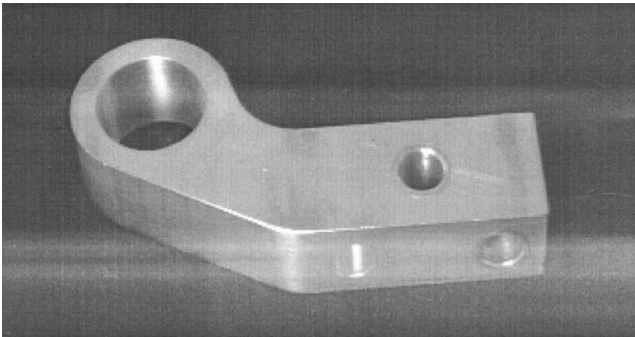


Fig. 13. Steering arm: original part.

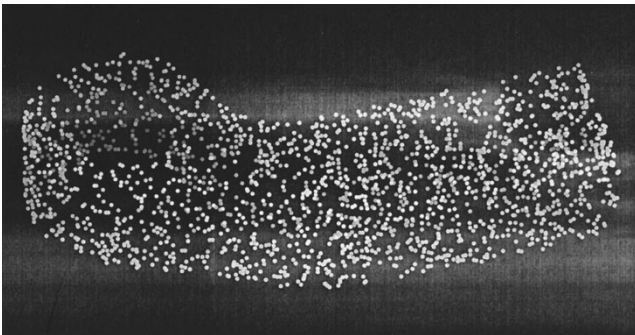


Fig. 14. Steering arm: sensed 3-D position points.

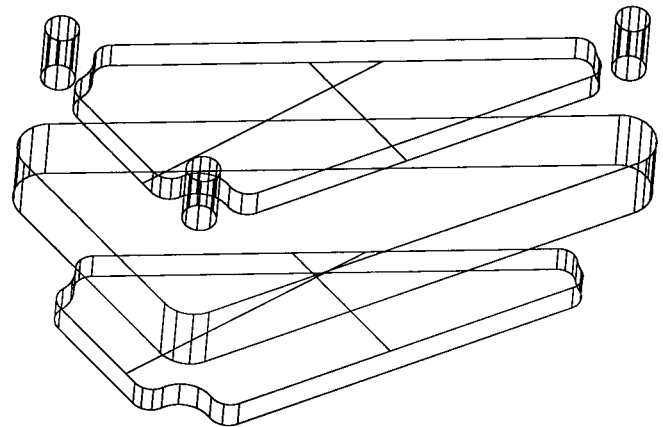


Fig. 17. Exploded view of the features making up the reverse engineered shock plate.

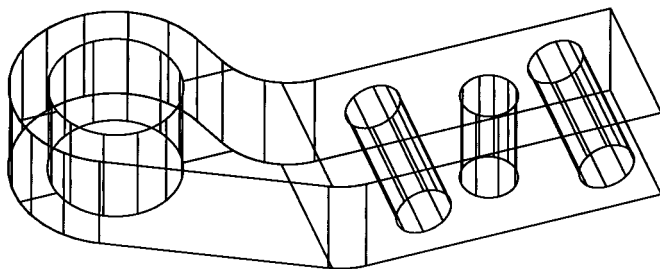


Fig. 15. Wire frame rendering of reverse engineered steering arm.

serve to lighten the part, and three mounting holes. The steering arm has an outer profile side with both smooth contours and sharp corners, one large hole and one smaller hole drilled normal to the stock, and two small holes drilled in a perpendicular orientation. While some current-generation techniques based on the fitting of spline patches or triangulated meshes have special case support for the extraction of holes

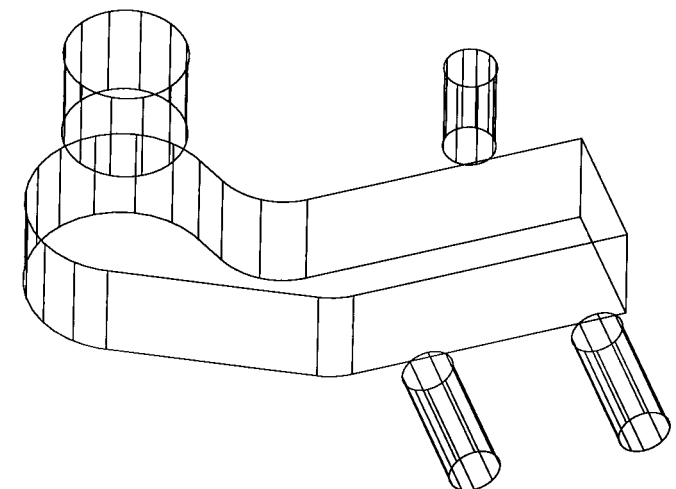


Fig. 18. Exploded view of the features making up the reverse engineered steering arm.

such as in Fig. 18, none can accomplish decompositions such as shown in Fig. 17 without extensive hand editing of the models.

Tables I and II show the quantitative deviation between the reconstructions and the original CAD model. It is important to note that the issues involved in determining meaningful measures of similarity between geometric models are complex and in fact largely unsolved [31]. Simple error norms fail to

TABLE I
MODELING ERROR—REVERSE ENGINEERED SHOCK PLATE (μm)

| Shock plate | RMS | worst-case |
|------------------------|-----|------------|
| <i>overall</i> | 86 | 398 |
| <i>outer profile</i> | 36 | 89 |
| <i>top cap</i> | 38 | 319 |
| <i>bottom cap</i> | 45 | 295 |
| <i>pocket 1 bottom</i> | 22 | 39 |
| <i>pocket 1 side</i> | 179 | 395 |
| <i>pocket 2 bottom</i> | 51 | 82 |
| <i>pocket 2 side</i> | 176 | 352 |
| <i>hole 1</i> | 123 | 178 |
| <i>hole 2</i> | 93 | 160 |
| <i>hole 3</i> | 79 | 128 |

TABLE II
MODELING ERROR—REVERSE ENGINEERED STEERING ARM (μm)

| Steering arm | RMS | worst-case |
|-----------------------|-----|------------|
| <i>overall</i> | 47 | 177 |
| <i>top</i> | 32 | 66 |
| <i>bottom</i> | 33 | 122 |
| <i>outer profile</i> | 51 | 177 |
| <i>large hole</i> | 55 | 123 |
| <i>small top hole</i> | 85 | 133 |
| <i>side hole 1</i> | 34 | 62 |
| <i>side hole 2</i> | 62 | 94 |

capture potentially important qualitative aspects of shape. The standard for comparison can be *as-designed*, *as-built*, or *as-is* shape, depending on the reason for doing the analysis. Comparing the results presented above with the current practice of fitting spline patches or triangulated meshes faces additional difficulties due to tuning parameters intrinsic to such methods.

VI. CONCLUSION

The use of manufacturing features as geometric primitives in part-to-CAD reverse engineering systems provides substantial advantages in usability and accuracy. The models which are produced are feature-based, providing a higher level description of part geometry. This allows easy importation into feature-based CAD systems and facilitates modifications to the derived models that would be extremely difficult to accomplish if only information about low-level surface shape were available, as is the case with current generation reverse engineering systems. Problems insuring that derived models are topologically correct, also a significant problem in current generation system, are minimized because of the constructive geometric computations intrinsic to feature-based CAD systems.

In a prototype system, we were able to reverse engineer CAD models with an accuracy often exceeding that of the precision of the sensor used to acquire raw data about part shape. User interaction involved a high level specification of

features rather than the tedious low-level editing of geometric descriptions for accuracy and consistency that is typically associated with nonfeature-based approaches. Top-down model fitting was able to exploit constraints allowing dimensionality reduction and restrictions on allowable shapes, resulting in geometric descriptions that were both more useful and more accurate than would otherwise be possible.

Our system does not yet deal with secondary feature properties such as taps, chamfers, fillets, and rounds. Each of these involves small scale geometry that requires specialized gauges for accurate measurement. Once measured, however, the feature based representation allows for easy addition of this information to the model without the difficult and error-prone surface blending that would be necessary if large-scale geometry were represented only as an unorganized set of surface patches.

It is important to note that the technique we are proposing here deals with only one aspect of the part-to-CAD reverse engineering process. Better methods are needed for deciding what sensors to use (CMM's, laser scanners, x-ray tomography, etc.), improving the accuracy of sensors that are available, and registering multiple scans into a common coordinate system. Open problems remain in combining free-form surfaces with manufacturing features, particularly with regards to segmentation and surface blending. Finally, almost no attention has been paid to automating tools for the production of technical data packages (TDP's) specifying ancillary information such as materials, finish, tolerances, etc.


ACKNOWLEDGMENT

The authors would like to thank P.-P. J. Sloan for creating the user interface, A. Efros and B. Morris for providing software support, S. Drake for giving important insights into the manufacturing process and assisting in the creation of test objects, D. Johnson for providing important assistance in the computation of modeling errors, and the Alpha.1 group for supplying technical support on geometric modeling and manufacturing.

REFERENCES


- [1] M. T. Traband, F. W. Tillotson, and J. D. Martin, "Reverse and reengineering in the DOD organic maintenance community: Current status and future direction," Tech. Rep. 96-060, Appl. Res. Lab, Pennsylvania State Univ., University Park, Feb. 1996.
- [2] M. Reed, P. K. Allen, and S. Abrams, "CAD model acquisition using BSP trees," in *Proc. IROS Int. Conf. Intell. Robots Syst.*, Aug. 1995, pp. 335–339.
- [3] R. Broacha and M. Young, "Getting from points to products," *Computer-Aided Eng.*, July 1995.
- [4] P. N. Chivate and A. G. Jablokow, "Solid-model generation from measured point data," *Computer-Aided Design*, Sept. 1993.
- [5] B. Sarkar and C. H. Menq, "Smooth-surface approximation and reverse engineering," *Computer Aided Design*, vol. 23, pp. 623–628, Nov. 1991.
- [6] L. Piegl, "On NURBS: A survey," *IEEE Comput. Graph. Applicat.*, pp. 55–70, Jan. 1991.
- [7] M. Lounsbery, S. Mann, and T. DeRose, "Parametric surface interpolation," *IEEE Comput. Graph. Applicat.*, Sept. 1992.
- [8] H. Hoppe, T. DeRose, T. Duchamp, J. McDonald, and W. Stuetzle, "Surface reconstruction from unorganized points," in *Proc. Comput. Graphics, SIGGRAPH '92*, July 1992, vol. 26.
- [9] ———, "Mesh optimization," in *Proc. Comput. Graphics, SIGGRAPH'93*, Aug. 1993, vol. 27.

- [10] ———, "Piecewise smooth surface reconstruction," *Proc. Comput. Graphics, SIGGRAPH'94*, July 1994, vol. 28.
- [11] Y. Chen and G. Medioni, "Object modeling by registration of multiple range images," *Int. J. Image Vision Comput.*, vol. 10, pp. 145–155, Apr. 1992.
- [12] ———, "Integrating multiple range images using triangulation," in *Proc. ARPA Image Understanding Workshop*, Apr. 1993, pp. 951–958.
- [13] G. Turk and M. Levoy, "Zipped polygon meshes from range images," in *Proc. Comput. Graphics, SIGGRAPH'94*, July 1994, vol. 28, pp. 311–318.
- [14] J. J. Shah, "Assessment of features technology," *Computer-Aided Design*, June 1991.
- [15] S. Drake and S. Sela, "A foundation for features," *Mech. Eng.*, vol. 111, Jan. 1989.
- [16] A. Fischer and M. Shpitalni, "Encoding and recognition of features by applying curvatures and torsion criteria to boundary representation," in *Proc. ASME 1992 Winter Ann. Meet.—Symp. Concurrent Eng.*, Nov. 1992, pp. 69–84.
- [17] J. Vandenbrande and A. Requicha, "Spatial reasoning for the automatic recognition of machinable features in solid models," *IEEE Trans. Pattern Anal. Machine Intell.*, pp. 1269–1285, Dec. 1993.
- [18] W. Regli, S. Gupta, and D. Nau, "Feature recognition for manufacturability analysis," Tech. Rep. ISR TR94-10, Univ. Maryland, College Park, Feb. 1994.
- [19] P. J. Rousseeuw and A. M. Leroy, *Robust Regression and Outlier Detection*. New York: Wiley, 1987.
- [20] P. J. Schneider, "An algorithm for automatically fitting digitized curves," in *Graphics Gems*, A. S. Glassner, Ed. New York: Academic, 1990.
- [21] P. Besl and R. Jain, "Segmentation through variable-order surface fitting," *IEEE Trans. Pattern Anal. Machine Intell.*, pp. 167–192, Mar. 1988.
- [22] M. Suk and S. Bhandarkar, *Three Dimensional Object Recognition from Range Images*. New York: Springer-Verlag, 1992.
- [23] W. Press, B. Flannery, S. Teukolsky, and W. Vetterling, *Numerical Recipes in C*. Cambridge, MA: Cambridge Univ., 1991.
- [24] R. M. Bolle and B. C. Vemuri, "On three-dimensional surface reconstruction methods," *IEEE Trans. Pattern Anal. Machine Intell.*, pp. 1–13, Jan. 1991.
- [25] W. B. Thompson, H. J. de St. Germain, T. C. Henderson, and J. C. Owen, "Constructing high-precision geometric models from sensed position data," in *Proc. ARPA Image Understanding Workshop*, Feb. 1996.
- [26] P. J. Schneider, "Solving the nearest-point-on-curve problem," in *Graphics Gems*, A. S. Glassner, Ed. New York: Academic, 1990.
- [27] R. Nevatia and K. Babu, "Linear feature extraction and description," *Comput. Graphics Image Process.*, vol. 13, pp. 257–269, 1980.
- [28] K. A. Ingle, *Reverse Engineering*. New York: McGraw-Hill, 1994.
- [29] W. B. Thompson and J. C. Owen, "'Hard-copy' benchmark suite for image understanding in manufacturing," in *Proc. ARPA Image Understanding Workshop*, Nov. 1994, pp. 221–227.
- [30] H. Y. Shum, K. Ikeuchi, and R. Reddy, "Virtual reality modeling from a sequence of range images," in *Proc. ARPA Image Understanding Workshop*, Nov. 1994, pp. 1189–1198.
- [31] W. B. Thompson, R. F. Riesenfeld, and J. C. Owen, "Determining the similarity of geometric models," in *Proc. ARPA Image Understanding Workshop*, Feb. 1996, pp. 1157–1160.




William B. Thompson (S'72–M'75–SM'91) received the Sc.B. degree in physics from Brown University, Providence, RI, and the M.S. and Ph.D. degrees from the University of Southern California, Los Angeles.

He is a Professor of Computer Science at the University of Utah, Salt Lake City. His research focuses on human and machine perception, including work on graphics and virtual environments, visual navigation, sensing for manufacturing, and the perception of visual motion.



Jonathan C. Owen received the M.S. degree in computer science from the University of Utah, Salt Lake City, and the B.S. degree in mechanical engineering from Rice University, Houston, TX.

He is currently doing game development for Red Storm Entertainment, Inc., Morrisville, NC. From 1994 to 1995, he was a Research Associate with the Vision/Robotics Research Project, University of Utah. His research interests include real-time rendering of outdoor terrain, animation, collision detection, and pathfinding.



H. James de St. Germain received the B.Sc. degree from New Mexico State University, Las Cruces, in 1991 and is currently pursuing the Ph.D. degree in computer science at the University of Utah, Salt Lake City.

His research interests include applications of geometric constraints to feature based reverse engineering.



Stevan R. Stark, Jr. received the B.S. degree in computer science from the University of Utah, Salt Lake City, in 1996.

He was a Research Associate with the University of Utah from 1996 to 1997. He is a Software Engineer for Orbtek Incorporated, Salt Lake City.



Thomas C. Henderson (M'82–SM'86) received the B.S. degree (with Honors) in mathematics from Louisiana State University, Baton Rouge, in 1973 and the Ph.D. degree in computer science from the University of Texas, Austin, in 1979.

He was a Research Fellow for one year at the German Aerospace Research Establishment (DFVLR), Oberpfaffenhofen, Germany, and a Visiting Professor for one year at the National Institute for Research on Informatics and Control Theory (INRIA), Roquencourt, France. In 1982, he joined the Department of Computer Science, University of Utah, Salt Lake City, where he is a Professor. He is the author of *Discrete Relaxation Techniques* (Oxford, U.K.: University of Oxford Press), and the Editor of *Traditional and non-Traditional Robotic Sensors* (Springer-Verlag). His major research interests include autonomous systems, computer vision, and robot behavior specification.

Dr. Henderson is Coeditor-in-Chief of the *Journal of Robotics and Autonomous Systems* and was an Associate Editor for the IEEE TRANSACTIONS ON PATTERN ANALYSIS AND MACHINE INTELLIGENCE.